

# MP5507-1/5507-2 RS232 CARD


## 1. DESCRIPTION

The RS-232 card is a mini size add-on card for IBM PC/AT (486™ /586™ /686™) system with one or two serial ports for connecting the system with serial devices such as modem, mouse, digitizer, serial plotter and serial printer.

## 2. FEATURES

- \* One or two RS-232 serial port.
- \* Each port can be set to COM1-COM7.  
(Address : 3F8,2F8,3E8,2E8,2F0,3E0,2E0)
- \* Each port can be use IRQ 3,4,5,9,10,11,12,15.
- \* Each port can be configured as 115.2K/230.4K/  
460.8K bps transmit/receive operation.

## 3. BOARD LAYOUT

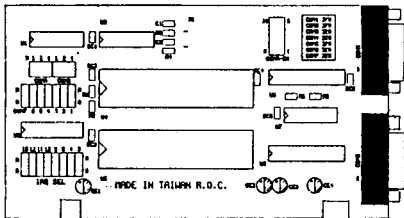

## 4. JUMPER SETTING

I/O address setting

(1-2) for COM A, (2-3) for COM B.	
1 : 3F8H/COM1	5 : 2F0H/COM5
2 : 2F8H/COM2	6 : 3E0H/COM6
3 : 3E8H/COM3	7 : 2E0H/COM7
4 : 2E8H/COM4	

IRQ setting

(1-2) for IRQ A, (2-3) for IRQ B.
Can select IRQ 3,4,5,9,10,11,12,15

CLOCK SETTING

x1 115.2K bps
x2 230.4K bps
x4 460.8K bps

\* IBM PC/AT™(486™/586™/686™)are thredemarks of international Business Machines Corp.



